

PRODUCED BY








**Hidro
Pneumotehnika**

DISTRIBUTED BY



FLOW CONTROL VALVE THREE-WAY

VRF C3C/V/..

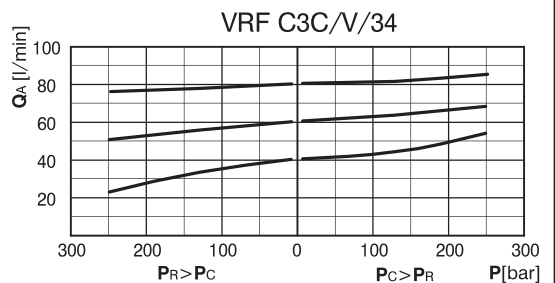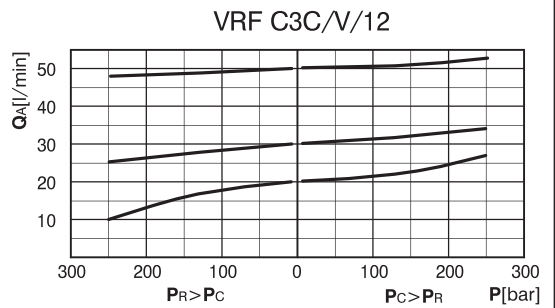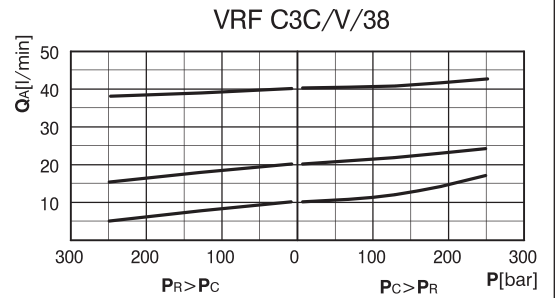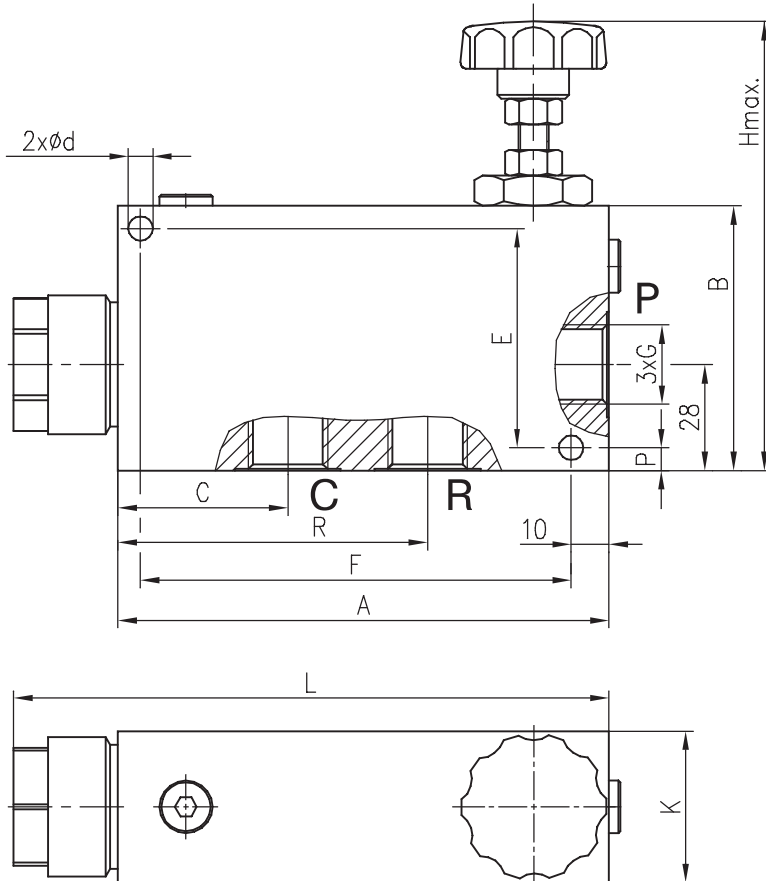

Type	P _{max.}	Q _{max} (L/min)		G	A	B	C	E	F	P	K	R	H	L	d
	bar	At port P	At port A		mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm
VRF C3C/V/38	250	60	40	G 3/8"	130	70	45	58	114	6	40	82	105	167	6,5
VRF C3C/V/12		90	50	G 1/2"											
VRF C3C/V/34		150	90	90	G 3/4"	155	90	57	74	135	8	50	101	191	

All performances and calibration are carried out by using hydraulic oil with viscosity approx. 46 cSt at 50 °C
 .Temperature range: -20 °C...+80 °C
 .Filtration absolute: 15 µm

ORDERING CODE

VRF C3C/V/38

